

---

## DATASHEET

SALTO \ HOSPITALITY

SALTO's broad product range covers every aspect of the access control spectrum, from back-of-house, guest services doors, to guest room doors management. An access control system for the hospitality sector with unprecedented flexibility.

Welcome to SALTO Hospitality Solutions.

[www.saltohospitality.com](http://www.saltohospitality.com)



## XS4 Mini - Australia

### XS4 MINI BY SALTO | ELECTRONIC DOOR LOCKS

Stylish design is a SALTO trademark and with the XS4 Mini, we raise the bar on this already high standard thanks to its small, discreet size combined with a modern, clean LED aesthetic.

The Mini's smart compactness simplifies installation. The XS4 Mini maintains the fire rating of the door as no additional drilling of the door is required.

# XS4 Mini - Australia

Ux150 | XS4 MINI FOR AUSTRALIAN MORTISE LOCKS

The XS4 Mini for Australian mortise locks has been designed for use with Australian mortise locks that use split spindle systems.




## FEATURES:

- Simple installation, using just two screws when installing on new or existing Australian doors standards.
- Clear, dual colour optical signalling indicates access authorisation. Acoustic signal optional.
- High security via high resistance, hardened anti-drill protection.
- Concealed fixing screws for greater security and improved aesthetics.
- For indoor applications: quick and easy install makes it ideal for retrofits.
- Wide range of handles, configurations and door retrofit cover plates.
- Wide range of finishes, handles and retrofit cover plates to meet the installation needs.

## READER COLOUR:



## FINISHES:



## TECHNICAL CHARACTERISTICS:

- Covers door thicknesses: From 32mm up to 90mm.
- Dimensions: 127mm x 58,5mm x 22,5mm.
- Reversible handle left or right electronic lock.
- Clutch mechanism escutcheon; when unlocked handle moves freely.
- Handle rotation: 45°.
- Australian standard prepared for Australian standard mortise locks.
- Initial max. 4° pre-turn. SALTO recommends the use of a mortise lock with a maximum 4° pre-turn.
- Compatible with European profile cylinders.
- Handles compatibility: 16mm Ø.
- Square spindles available: 7,6mm split, 8mm and 8mm split.


## PLATFORMS:




## ID TECHNOLOGIES :

- MIFARE® (DESFire EV1, Plus, Ultralight C, Classic - ISO/IEC 14443).
- Bluetooth SMART (BLE).
- NFC.

## HANDLES:

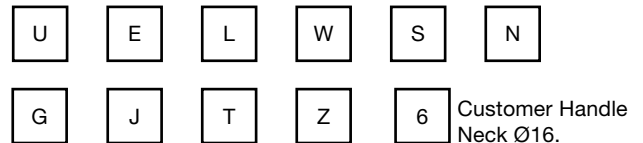

## TECHNICAL DRAWING:

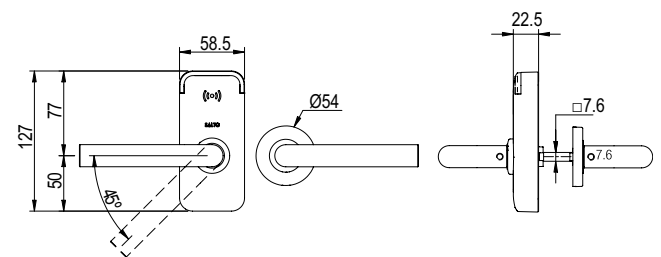

## CERTIFICATIONS:



---

## Technical Data

### POWER SOURCE:

- XS4 Mini: 3 alkaline batteries - LR03 - AAA 1,5V

### NUMBER OF OPENINGS:

- Contactless versions: Up to 40,000 openings.
- Low battery power indication monitored through the SALTO Virtual Network (SVN).
- The last approx. 1,000 operations are signalled.

### ENVIRONMENTAL CONDITIONS:

- Not suitable for outdoor use.

---

## Main Features

- Fully integrated with the SALTO XS4 platform.
- Simple installation by changing handle set, using just two screws, whether installing on new or existing door standards.
- Easy to maintain: Battery change is all that's needed.
- For inside use: Attractive design is ideal for indoor use and easy to retrofit existing doors.
- User on card audit trailing capability via the SALTO Virtual Network (SVN).
- All communication between the carrier and the electronic lock is encrypted and secured.
- Low battery status information is obtained from carriers.
- Optical signalling through light ring. Dual colour green/red to indicate access authorisation.
- The lock can always be opened from the inside (single action panic feature works in conjunction with the relevant mortise lock).
- Concealed fixing screws for greater security and improved aesthetics.
- Available in 2 different reader finishes: White and Black.
- Wide range of finishes, retrofits, handles and retrofit cover plates.
- Firmware upgrade through contactless PPD.
- Emergency opening via contactless portable programming device (PPD).

---

## Access Control Features

### USERS & DOORS:

- Maximum number of users per door: 4 million.
- Maximum number of doors per system: 65,000.
- Access levels: unlimited.

### CALENDARS & TIME ZONES:

- Calendars in system: 256
- Time tables: 1024
- Time periods: 1024

### EVENTS:

- Maximum events on lock audit: 2200.
- Non volatile memory (memory is not deleted, even if power fails).

### MANAGEMENT SOFTWARE:

- SALTO ProAccess SPACE.

### ID TECHNOLOGIES:

- Covering the mainstream MIFARE RFID technologies.
  - Compatible with ISO 14443A, ISO 14443B and ISO 15693 (Vicinity).
- 

## Lock Modes

### STANDARD:

Locked at all times.

### OFFICE MODE:

Free passage.

### TIMED OFFICE:

Automatic locking at end time.

### AUTOMATIC OPENING:

8 pairs of "hands free" timed lock and unlocks per day with holidays.

### TOGGLE:

Present card to lock, present card to unlock.

### TIMED TOGGLE:

Present card to lock, present card to unlock depending on schedules.